

## Spannzangenfutter ER für Spannzangen DIN 6499

Collet chuck ER / Syst. Regofix for collets DIN 6499

Mandrin à pinces / Syst. Regofix pour pinces DIN 6499

**Lieferumfang / Including:**

mit Spannmutter DIN6499

with Collet-Nut DIN6499

avec ecrou de serrage DIN6499

### Rundlaufabweichung:


SK zu Innenkegel 5 µm max.

### Accuracy:

taper to inner cone 5µm max.


### Precision:

Faux-rond admissible du cône au tennon 5µm

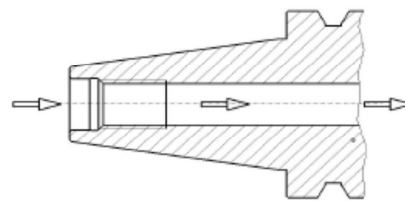

### Form AD

zentrale Kühlmittelzufuhr  
coolant through center  
eau de refroid. centrale

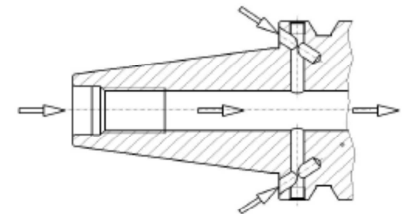

### Form AD/B

kombinierbare Kühlmittelzufuhr  
combined coolant version  
eau de refroidissement combiné

	BT	x	ER	x	A	L	D	Artikel-Nr.
<b>BT 30</b>	30	x	16	x	70	118	32	G410 30x16x 70
	30	x	16	x	100	148	32	G410 30x16x100
	30	x	25	x	70	118	42	G410 30x25x 70
	30	x	32	x	70	118	50	G410 30x32x 70
<b>BT 40</b>	40	x	16	x	60	126	32	G410 40x16x 60
	40	x	16	x	100	166	32	G410 40x16x100
	40	x	16	x	160	226	32	G410 40x16x160
	40	x	25	x	60	126	42	G410 40x25x 60
	40	x	25	x	100	166	42	G410 40x25x100
	40	x	25	x	160	226	42	G410 40x25x160
	40	x	32	x	60	126	50	G410 40x32x 60
	40	x	32	x	100	166	50	G410 40x32x100
	40	x	32	x	160	226	50	G410 40x32x160
	40	x	40	x	80	146	63	G410 40x40x 80
	40	x	40	x	160	226	63	G410 40x40x160

	BT	x	ER	x	A	L	D	Artikel-Nr.
	50	x	16	x	100	202	32	
<b>BT</b>	50	x	25	x	70	172	42	G410 50x25x 70
<b>50</b>	50	x	25	x	160	262	42	
	50	x	32	x	70	172	50	G410 50x32x 70
	50	x	32	x	100	202	50	G410 50x32x100
	50	x	32	x	160	262	50	G410 50x32x160
	50	x	40	x	80	182	63	G410 50x40x 80
	50	x	40	x	160	262	63	
	50	x	50	x	80	182	78	G410 50x50x 80

gewuchtet / balanced / équilibré  
auf **G6,3** bei 12.000 U/min